

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number
WO 01/37249 A2

(51) International Patent Classification⁷: **G09G 3/00**

[JP/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
YASUI, Masaru [JP/NL]; Prof. Holstlaan 6, NL-5656 AA
Eindhoven (NL). KAMIYA, Takeo [JP/NL]; Prof. Holst-
laan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: **PCT/EP00/11250**

(22) International Filing Date:
10 November 2000 (10.11.2000)

(74) Agent: RAAP, Adriaan, Y.; Internationaal Octrooibureau
B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(25) Filing Language: English

(81) Designated States (*national*): KR, US.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(30) Priority Data:
11/321901 12 November 1999 (12.11.1999) JP

(71) Applicant (*for all designated States except US*): KONIN-
KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

Published:


— Without international search report and to be republished
upon receipt of that report.

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): HIRANO, Satoshi

(54) Title: LIQUID CRYSTAL DISPLAY APPARATUS

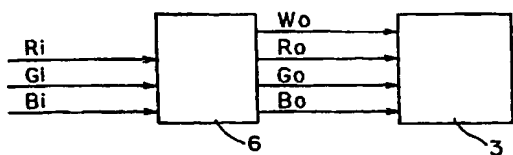

a

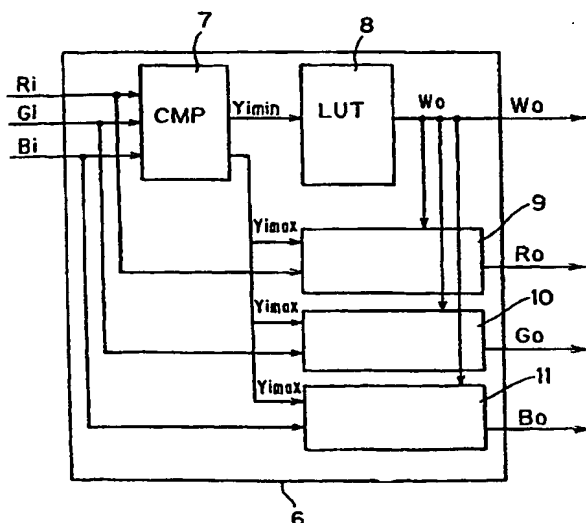

b

(57) Abstract: In an RGBW-type liquid crystal display device, luminance is improved by the addition of W sub-pixels while an image is displayed without any change in chromaticity of halftones. Digital corrected values for red, green and blue are obtained by adding a predetermined digital value for driving a W sub-pixel to each of RGB digital values which correspond respectively to pixels of an acquired image. A converting calculation is effected on the digital corrected values such that the ratio of these digital corrected values for red, green and blue is made equal to the ratio of the red, green and blue digital values corresponding to the pixels of said acquired image. The RGBW sub-pixels are driven with the converted values and the predetermined digital value for driving W sub-pixel to thereby display an image.

WO 01/37249 A2

Liquid crystal display apparatus

This invention relates to a liquid crystal display apparatus capable of displaying color images.

5 In recent years, liquid crystal display apparatuses capable of displaying color images have been widely used as display apparatuses, for example, for personal computers, video cameras and car navigation systems.

A Liquid crystal display apparatus of the RGBW type (hereinafter referred to as "an RGBW-type liquid crystal display apparatus"), on which a transparent filter (W) is
10 arranged in addition to an RGB filter of the conventional RGB type, has been proposed in Japanese Patent Application Laid-open No.10998/1998 as a method for improving luminance of pixels of a liquid crystal panel of such liquid crystal display apparatus.

However, even if the transparent filter is added in order to improve luminance, the ratio of red, blue and green of the original image will be changed, since the white color is
15 mixed in all display colors. As a result, the color purity (color saturation) of a displayed image is reduced with respect to the original image, so that a chromaticity will be changed, in particular, in halftones.

20 Accordingly, an object of the invention is to provide an RGBW-type liquid crystal display apparatus in which a chromaticity is not changed even in halftones, by adding a white component to a red component, a green component and a blue component of an original input image for improving luminance thereof and thereafter further converting the ratio of these red, green and blue components after the addition of the white component into
25 the ratio of the red, green and blue components of the original image to drive each RGBW sub-pixel.

In the liquid crystal display apparatus according to the invention, the chromaticity of halftones of the original image will not change even when a white component

is added to each component of red, blue and green colors of the original image to improve the luminance, thus the above object being achieved.

These and other aspects of the invention are apparent from and will be elucidated with reference to embodiments described hereinafter with reference to the
5 accompanying drawings, in which:

Fig. 1 is a block diagram showing the constitution of a liquid crystal display apparatus 100 according to a preferred embodiment of the invention;

10 Fig. 2 is a top plane view of the liquid crystal panel 1 of Fig. 1, in which the arrangement of sub-pixels, gate buses and source buses are illustrated;

Fig. 3 is a block diagram schematically illustrating a source driver 3 and a decoder 6 shown in Fig.1;

15 Fig. 4 is an illustration which explains the function of the preferred embodiment; and

Fig. 5 is a graph which explains a modification of the embodiment.

20 These Figures are diagrammatic and not to scale, and wherein corresponding components are generally denoted by the same reference numbers.

A preferred embodiment of a liquid crystal display apparatus according to the invention will now be described.

Fig. 1 is a block diagram showing the constitution of a liquid crystal display apparatus 100 according to an embodiment of the invention. This liquid crystal display
25 apparatus 100 is provided with a liquid crystal panel 1.

Fig. 2 is a top plane view of this liquid crystal panel 1 in which a horizontal cross-section of the panel is schematically shown.

This liquid crystal panel 1 is provided with gate buses G1 to Gm (m: a natural number) each extending in a row direction and source buses S1 to Sn (n: a natural number)
30 each extending in a column direction as shown in Fig. 2. The gate buses G1 to Gm are connected to a gate driver 2, and the source buses S1 to Sn are connected to source drivers 3.

A sub-pixel Lij of R (red), G (green), B (blue) or W (white) is disposed within each area defined by the gate buses Gi and Gi+1 (i = 1 to m) and the source buses Sj and Sj+1 (j = 1 to m).

A TFT (thin film transistor) Q_{ij} is arranged in the vicinity of each intersection of the gate bus G_i and the source bus S_j .

Furthermore, the gate bus G_i is connected to a gate of the TFT Q_{ij} , the source bus S_j to a source of the TFT Q_{ij} , and a display electrode of the sub-pixel L_{ij} to a drain of the TFT Q_{ij} .

Opposed to the display electrode of each sub-pixel L_{ij} is a common electrode which is connected to a common voltage supply circuit (not shown).

When the sub-pixels are arranged in the form of vertical stripes as shown in Fig. 2, color filters for RGBW are arranged in the following manner with respect to each sub-pixel L_{ij} , wherein one pixel is constituted by four sub-pixels of RGBW.

R: L_{ij} ($i=1, 2, 3, \dots, m-1$; $j=1, 5, 9, \dots, n-3$)

G: L_{ij} ($i=1, 2, 3, \dots, m$; $j=2, 6, 10, \dots, n-2$)

B: L_{ij} ($i=1, 2, 3, \dots, m$; $j=3, 7, 11, \dots, n-1$)

W: L_{ij} ($i=1, 2, 3, \dots, m-1$; $j=4, 8, 12, \dots, n$)

In this liquid crystal panel 1, a TFT substrate (not shown) on which the sub-pixel electrodes are formed, a color filter substrate on which the common electrode is formed and a glass substrate or the like are arranged in a direction perpendicular to a surface of the panel and a liquid crystal is filled in a space between the substrates.

The description of the liquid crystal display apparatus 100 will be continued with reference to Fig.1 again.

The gate driver 2 and the eight source drivers 3 are arranged around the liquid crystal panel 1. Each source driver 3 comprises amplifiers, DACs (DA converters) and latches, all of which are not shown. A decoder 6 is connected to the eight source drivers 3. This decoder 6 is connected to an image data holding section 5 for converting an input signal to digital data, and receives therefrom eight-bit sub-pixel data of the acquired image.

This liquid crystal display apparatus 100 further comprises a signal control section 4. This signal control section 4 feeds a power supply voltage to the gate driver 2 and the source drivers 3, and supplies control signals to the gate driver 2 and the source drivers 3.

The liquid crystal display apparatus 100 also comprises a reference potential generating circuit (not shown) for applying a reference potential to each source driver 3.

The operation of the liquid crystal display apparatus 100 shown in Fig. 1 will be described below.

The control signals are supplied from the signal control section 4 to the gate driver 2 and the respective source drivers 3. The gate driver 2 transmits, based on the control

signal, to the respective gate buses (refer to Fig. 2) signals for turning TFTs Qij into the on condition.

When the control signal is supplied to each source driver 3, a latch portion (not shown) of each source driver 3 latches, based on the above control signal, eight-bit sub-pixel data (hereinafter referred to as "sub-pixel output luminance data Ro, Go, Bo and Wo") which have been obtained by the decoder 6 as signals for RGBW sub-pixels by performing a predetermined calculation (described later) on the data of image data RGB (hereinafter referred to as "sub-pixel input data Ri, Gi, and Bi") constituting the digital image as held in the image data holding section 5.

The sub-pixel data latched in the latch portion are sequentially supplied to a DAC portion (not shown). The signal control section 4 also outputs a polarity control signal for controlling whether the DAC portion selects a potential from the positive polarity reference potential generated by the reference potential generating circuit or a potential from the negative polarity reference potential generated by the reference potential generating circuit. This polarity control signal is input to the DAC portion. The DAC portion selects, based on the input polarity control signal and the sub-pixel output luminance data, a potential from the potential generated by the reference potential generating circuit which corresponds to the RGBW sub-pixel output luminance data.

When a potential is thus selected in the DAC portion, the DAC portion divides a voltage of the selected reference potential by a resistance division into appropriate steps so as to obtain a desired gradation. Thereafter, the divided voltage is current-amplified by an amplifier (not shown) and transmitted to a corresponding one of the source buses S1 to Sn (refer to Fig. 2). When TFTs are rendered on by a signal transmitted to any one of the gate buses G1 to Gm, the signal transmitted to the source bus and representing the potential is transferred through the above TFT to the corresponding pixel electrode.

In this manner, a potential corresponding to the sub-pixel data is given to each sub-pixel electrode. Therefore, a voltage is applied to each portion of the liquid crystal layer which is sandwiched between the common electrode and a respective one of the sub-pixel electrodes, so that the liquid crystal layer is driven in accordance with the potentials applied to the respective sub-pixel electrodes, whereby an image is displayed on the liquid crystal panel 1 in accordance with the principle of additive color mixing.

A preferred embodiment of the calculation processing performed in the above-described decoder 6 will now be described with reference to Figs.3(a) and 3(b) and mathematical formulas (1) to (5).

As shown in Fig. 3(a), the decoder 6 has a function of receiving the sub-pixel input data Ri, Gi, and Bi from the image data holding section 5 (Fig. 1), obtaining from these data the luminance data Wo for the luminance-enhancing sub-pixel and the sub-pixel output luminance data Ro, Go, Bo and Wo by calculation, and outputting these data to the source driver 3. Alternatively, the decoder 6 may be arranged to receive the sub-pixel input data Ri, Gi, and Bi from the image data holding section 5, to convert the data into values in the luminance dimension and then to perform the calculation.

In general, there is a relationship $Y=kDig^{2.2}$ (k is a constant of proportion) between a digital value Dig (an digital input data) and luminance Y in a display for a computer. In the calculation processing according to the present embodiment, a calculation which will be described later can also be performed using this luminance dimension.

However, by the conversion into such luminance dimension an eight-bit digital signal will become a value of the order of 16 bits, and as a result, a circuit to be used will become more sophisticated and large, whereby the cost will be increased.

For this reason, the calculation may be performed on the digital value, as it is, without any conversion of the above dimension in order to simplify the circuit. Even if the calculation is simplified, the influence on the quality of the displayed image will not be so large as to cause any trouble, and the quality may be acceptable in the practical use. Moreover, various calculation formulas according to the invention described herein can be explained based on the same principles regardless of the dimension of each data of red, blue and green.

Accordingly, the digital input value would be used as it is for the sake of simplify in the following description of the embodiment.

The internal structure and the operation of the decoder 6 will be described with reference to Fig.3 (b).

The decoder 6 is provided with a comparator 7, a look-up table 8, a red calculating circuit 9, a blue calculating circuit 10 and a green calculating circuit 11 as shown in Fig. 3(b).

The comparator 7 receives sub-pixel input data Ri, Gi, and Bi from the image data holding section 5 and then compares magnitudes of the data values of Ri, Gi and Bi to one another. The comparator 7 then obtains the maximum and minimum values of the data values of Ri, Gi and Bi as its comparison results, and outputs the minimum value to the look-up table 8 as Yimin and outputs the maximum value to the red calculating circuit 9, the blue calculating circuit 10 and the green calculating circuit 11 as Yimax.

The look-up table 8 receives the above minimum value Y_{\min} and converts it into luminance data W_o for the luminance-enhancing sub-pixel.

This conversion in the look-up table 8 is performed by using PROM in which calculation results of a function $W_o = f(Y_{\min})$ for each value of a variable Y_{\min} are stored in addresses for Y_{\min} , wherein Y_{\min} ranges from zero to 255 when each sub-pixel is expressed in 256-step gradation. Alternatively, this conversion may be performed using a calculating circuit.

On the other hand, each of the red calculating circuit 9, the blue calculating circuit 10 and the green calculating circuit 11 performs a calculation according to a respective one of the following formulas with a respective value of data of the R_i , G_i , and B_i , the Y_{\max} value and the W_o value:

mathematical formula (1): $R_o = R_i \cdot (W_o + Y_{\max}) / Y_{\max} - W_o$;

mathematical formula (2): $G_o = G_i \cdot (W_o + Y_{\max}) / Y_{\max} - W_o$; and

mathematical formula (3): $B_o = B_i \cdot (W_o + Y_{\max}) / Y_{\max} - W_o$;

(hereinafter referred to simply as “the mathematical formula (1)”, “the mathematical formula (2)”, and “the mathematical formula (3)”, respectively) to thereby obtain a respective one of the sub-pixel output luminance data R_o , G_o and B_o .

The decoder 6 then outputs these RGB sub-pixel output luminance data R_o , G_o and B_o to the source drivers 3 together with W_o .

The above-described mathematical formula (1) is a formula obtained by modifying mathematical formula (4): $R_i / Y_{\max} = (R_o + W_o) / (Y_{\max} + W_o)$ (hereinafter referred to simply as, “mathematical formula (4)”).

More specifically, the mathematical formula (4) is a relational expression for the purpose that the ratio between the data values R_i , G_i and B_i can be made equal to the ratio between the values obtained by adding W_o to the respective data R_o , G_o and B_o , when the sub-pixel output luminance data R_o , G_o and B_o for the RGB sub-pixels are obtained by adding the sub-pixel output luminance data W_o for the W sub-pixel to the RGB sub-pixel input luminance data R_i , G_i , and B_i .

Similarly, the mathematical formula (2) is a formula obtained by modifying mathematical formula (5): $G_i / Y_{\max} = (G_o + W_o) / (Y_{\max} + W_o)$, and the mathematical formula (3) is a formula obtained by modifying mathematical formula (6): $B_i / Y_{\max} = (B_o + W_o) / (Y_{\max} + W_o)$, (hereinafter referred to simply as “mathematical formula (5)”, and “mathematical formula (6)”, respectively).

For the chromaticity of the image which is formed by the liquid crystal panel 1, the following effects can be obtained by driving the source drivers 3 with the RGB sub-pixel output luminance data R_o , G_o and B_o and the sub-pixel output luminance data W_o for the W sub-pixels which have been obtained by the above mathematical formulas 1 to 3.

5 For example, when the above function $W_o = f(Y_{min})$ is represented by mathematical formula (7): $W_o = Y_{min}$ (hereinafter referred to simply as, "mathematical formula (7)"), the minimum value of R_i , G_i and B_i is selected as the value W_o . As a result, when at least one of the values R_i , G_i and B_i is zero, $W_o = 0$ is established.

10 In this case, $R_o = R_i$, $G_o = G_i$ and $B_o = B_i$ are obtained according to the mathematical formulas (1) to (3). Accordingly, the chromaticity does not change in this case.

Moreover, according to the mathematical formulas (1) to (3), the ratio between the data values R_i , G_i and B_i is equal to the ratio between the values obtained by adding W_o to the respective data R_o , G_o and B_o , so that the ratio between the colors does not change, as
15 a result the chromaticity does not change even in the halftones.

As a specific example, the embodiment (an example of operation) of the decoder 6 will be described for the case of $R_i=240$, $G_i=160$ and $B_i=120$ with reference to Fig. 4.

First, the comparator 7 receives $R_i = 240$, $G_i = 160$, and $B_i = 120$ as its input
20 data from the image data holding section 6 and determines from $R_i = 240$, $G_i = 160$ and $B_i = 120$ that the minimum value is 120 and the maximum value is 240, with the result that $Y_{min} = 120$, $Y_{max} = 240$.

The look-up table 8 determines $Y_{min} = 120$, which is output from the comparator 7, to be W_o value (here, the case where the value $W_o = f(Y_{min})$ is represented
25 by the mathematical formula (7) is taken as an example).

Finally, the values of $Y_{min}=120$ and $Y_{max}=240$ and $W_o=120$ output from the comparator 7 and the look-up table 8, and the values of the RGB sub-pixel input luminance data $R_i=240$, $G_i=160$, and $B_i=120$ are substituted into the mathematical formulas 1 to 3 by the calculating circuits 9 to 11, respectively, whereby the RGBW sub-pixel output
30 luminance data $R_o=360$, $G_o=240$ and $B_o=180$ are obtained (refer to Fig. 4(c)).

As is apparent from this result, according to the calculations by the mathematical formulas 1 to 4, $R_i:G_i:B_i=240:160:120=6:4:3$ are obtained and $R_o:G_o:B_o=360:240:180=6:4:3$ are obtained. Thus, it will be understood that the relation of $R_i:G_i:B_i=R_o:G_o:B_o$ is satisfied.

Since the ratio of RGB of the output luminance data will not differ from the ratio of RGB of the input data even when W_o is added in order to improve luminance, the chromaticity (color saturation) of the halftones will not be degraded. It is needless to say that the relation represented by the mathematical formulas (4) to (6) is also satisfied even in the case where the digital value of each variable is converted into the dimension of luminance for the reason mentioned above.

More specifically, when the digital value R_i , G_i , and B_i for the red input sub-pixel, the green input sub-pixel and the blue input sub-pixel obtained from the input image are converted into R_I , G_I and B_I as the values having the dimension of luminance, and the luminance values for the red output sub-pixel, the green output sub-pixel, the blue output sub-pixel and the luminance-enhancing sub-pixel are represented as R_O , G_O , B_O and W_O , the relation of $R_I:G_I:B_I=1 (R_O+W_O):(G_O+W_O):(B_O+W_O)$ will be satisfied.

Furthermore, various kinds of modifications can be adopted to the above-described preferred embodiment. Such modifications will now be described.

In the preferred embodiment, although output luminance data for sub-pixel W_o is defined as the value obtained by the function in which the minimum value Y_{min} of input data for RGB sub-pixel R_i , G_i , and B_i is taken as a variable, a value which is obtained by other functions in accordance with the target optical characteristic (luminance) may also be selected as W_o .

(1) For example, a W_o value which is obtained by a calculating formula represented by $W_o=f(Y_{min}, Y_{max})$ as a function which is monotonously increased as each of these two values Y_{min} and Y_{max} increases, or as a function which is monotonously increased as the minimum value Y_{min} increases with the maximum value Y_{max} being a constant may also be selected as the function, when the maximum value and the minimum value of the input data R_i , G_i , and B_i for the RGB sub-pixels are Y_{max} and Y_{min} , respectively.

(2) When it is desired to emphasize white of maximum luminance, a W_o value which is obtained by a function such as mathematical formula (8): $W_o=255*(Y_{min}/255)^2$ may also be selected.

(3) When it is desired to brighten the halftones, a W_o value which is obtained by a function such as mathematical formula (9): $W_o=-Y_{min}^3/255^2+Y_{min}^2/255+Y_{min}$ can also be selected.

In the mathematical formulas (8) and (9), Y_{min} is the minimum value of input luminance data for RGB sub-pixels R_i , G_i , and B_i as in the preferred embodiment.

However, when a W_o value is selected, limits should be defined as will be described below, while satisfying the condition that the ratio between the colors is maintained.

When the maximum value and the minimum value of the input data are Y_{max} and Y_{min} , and the maximum value and the minimum value of the output luminance data are Y_{omax} and Y_{omin} , a formula $Y_{min}/Y_{max} = (Y_{omin} + W_o)/(Y_{omax} + W_o)$ should be established in order to maintain the ratio between the respective colors, where $Y_{omax} = Y_{max}$.

Since the sub-pixel for luminance is added in order to increase luminance, it is desirable that the value of W_o which is given thereto is as large as possible.

To give a value as large as possible to W_o means to replace all the white components in the output data with W_o , with $Y_{omin} = 0$, the formula described above can be modified into $Y_{min}/Y_{max} = W_o/(Y_{max} + W_o)$.

When solving this formula with respect to W_o , the following formula can be obtained: $W_o = Y_{min} * Y_{max} / (Y_{max} - Y_{min})$.

In this formula, it is understood that $W_o > Y_{max}$ can be obtained when $Y_{min}/Y_{max} > 0.5$. When Y_{max} is the maximum value which can be taken (for example, 255 gradation level in the case of eight bits), W_o satisfying $W_o > Y_{max}$ does not exist.

Therefore, $W_o = Y_{max}$ is established when $Y_{min}/Y_{max} > 0.5$.

In summary, the ratio between the respective colors can be maintained by selecting an optional function so as to satisfy the following relation in order to determine W_o .

When $Y_{min}/Y_{max} \leq 0.5$, a formula $W_o \leq Y_{min} * Y_{max} / (Y_{max} - Y_{min})$ can be obtained.

When $Y_{min}/Y_{max} > 0.5$, a formula $W_o \leq Y_{max}$ can be obtained.

Although W_o is represented as a function of Y_{min} and Y_{max} , since an area of W_o becomes narrower as Y_{max} becomes larger, the range in which an arbitrary Y_{max} can be applied is as shown by hatching in Fig. 5. That is to say, this hatched area is the range of values of W_o which can be added for improving luminance while satisfying the condition that the ratio between the respective colors is maintained.

As described above, according to the liquid crystal display device of the invention, the luminance can be improved appropriately without changing the chromaticity of halftones, even when the luminance of the image displayed on the liquid crystal panel is attempted to be enhanced by the white sub-pixels for increasing luminance.

CLAIMS:

1. A liquid crystal displaying apparatus capable of displaying a color image comprising a liquid crystal panel in which each main pixel unit including a red sub-pixel, a green sub-pixel, a blue sub-pixel and a luminance-enhancing sub-pixel characterized by comprising:
5 calculation means for calculating digital output values R_o , G_o and B_o for driving said red sub-pixel, said green sub-pixel and said blue sub-pixel, respectively, from digital input values R_i , G_i and B_i respectively for said red sub-pixel, said green sub-pixel and said blue sub-pixel and a predetermined digital value W for driving said luminance-enhancing sub-pixel so that a relationship of $R_i:G_i:B_i = (R_o+W):(G_o+W):(B_o+W)$ is
10 satisfied, said values R_i , G_i and B_i being obtained from an input color image.
2. A liquid crystal displaying apparatus according to claim 1 characterized in that said digital value W is obtained in accordance with a function represented by a formula $W = f(Y_{min})$ where Y_{min} is a minimum value of said digital input values for said red sub-pixel,
15 said green sub-pixel and said blue sub-pixel.
3. A liquid crystal displaying apparatus according to claim 1 characterized in that said digital value W is obtained in accordance with a function represented by a formula $W = f(Y_{max}, Y_{min})$ where Y_{max} and Y_{min} are a maximum value and a minimum value,
20 respectively, of said digital input values for said red sub-pixel, said green sub-pixel and said blue sub-pixel.
4. A liquid crystal displaying apparatus according to claim 3 characterized in that said function represented by said formula $W = f(Y_{max}, Y_{min})$ is a function which
25 monotonously increases as a value of said Y_{max} value or said Y_{min} value becomes larger.
5. A liquid crystal displaying apparatus according to claim 3 characterized in that said formula of W is given by a function in which said Y_{min} is a variable with said Y_{max}

being a constant and in that said function represented by said formula $W = f(Y_{\max}, Y_{\min})$ is a function which monotonously increases as a value of said Y_{\min} becomes larger.

6. A liquid crystal displaying apparatus according to any one of claims 1 to 5
- 5 characterized in that said digital input values R_i , G_i and B_i for said red, green and blue sub-pixels obtained from said input color image are converted respectively into R_I , G_I and B_I as values having a dimension of luminance, and in that a relationship of $R_I:G_I:B_I = (R_O+W_O):(G_O+W_O):(B_O+W_O)$ is satisfied when luminance values for said red sub-pixel, said green sub-pixel, said blue sub-pixel and said luminance-enhancing sub-pixel are
- 10 represented by R_O , G_O , B_O and W_O , respectively.

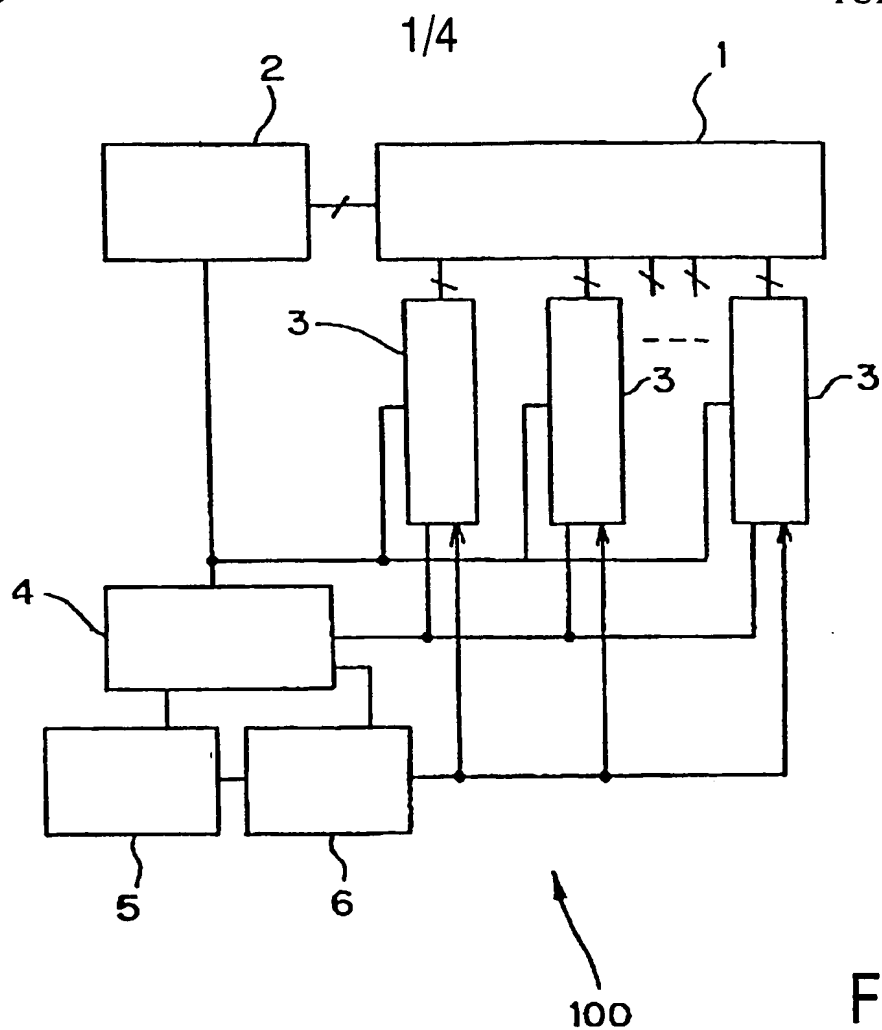


FIG. 1

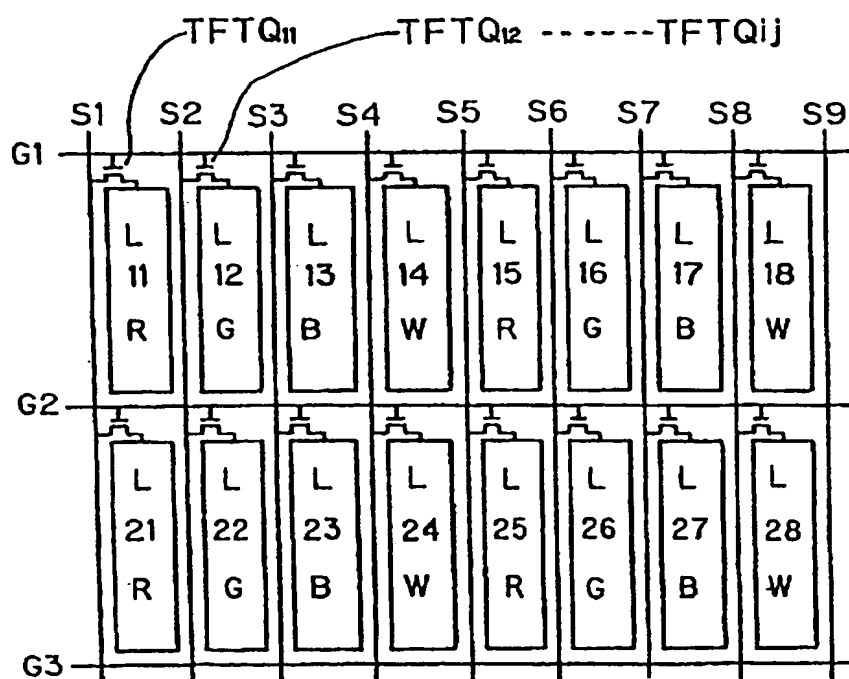


FIG. 2

2/4

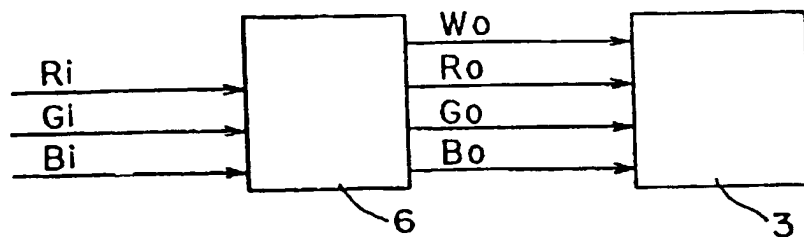


FIG. 3a

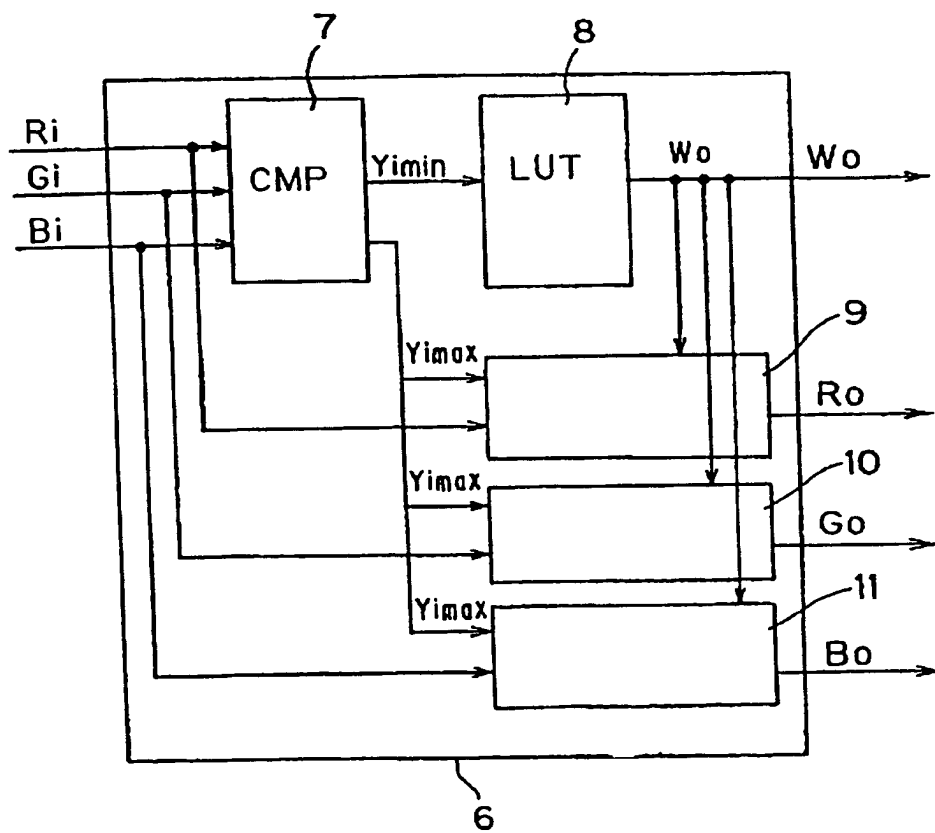


FIG. 3b

3/4




FIG. 4a




FIG. 4b

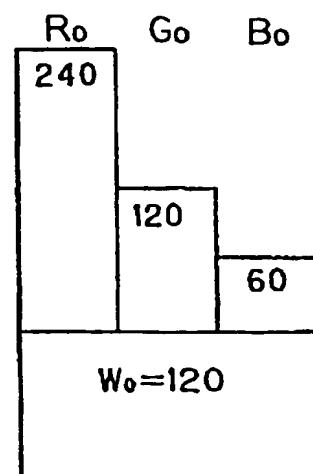


FIG. 4c

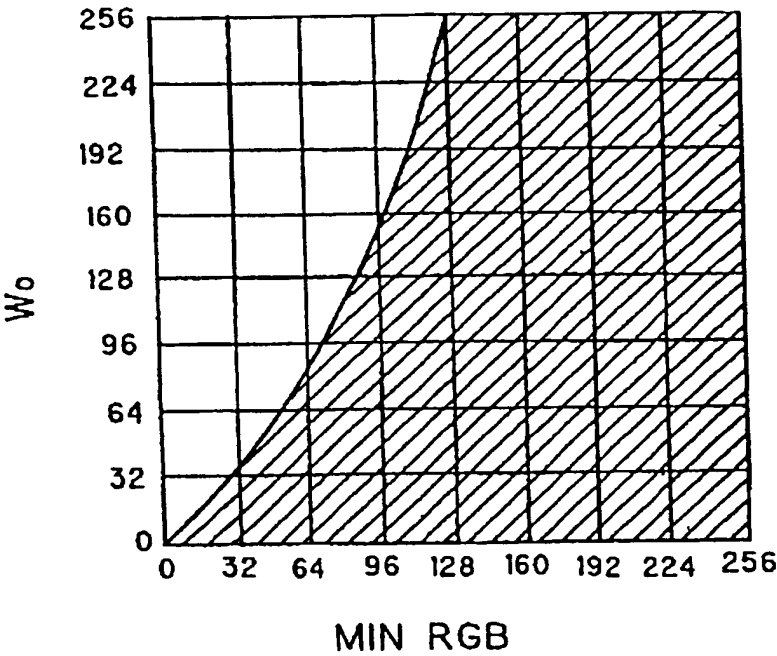


FIG. 5

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 May 2001 (25.05.2001)


PCT

(10) International Publication Number
WO 01/37249 A3



- (51) International Patent Classification⁷: **G09G 3/36** (72) Inventor: **KAMIYA, Takeo** (deceased).
- (21) International Application Number: **PCT/EP00/11250** (72) Inventors; and
(75) Inventors/Applicants (for US only): **HIRANO, Satoshi** [JP/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
YASUI, Masaru [JP/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (22) International Filing Date:
10 November 2000 (10.11.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11/321901 12 November 1999 (12.11.1999) JP
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (74) Agent: **RAAP, Adriaan, Y.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): **KR, US.**
- (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (71) Applicant (for US only): **MIYAZAKI, Akihiko** (legal representative of the deceased inventor) [JP/JP]; 2-2-7-604, Miyazaki, Miyamae-ku, Kawasaki-shi, Kanagawa (JP).
- Published:**
— with international search report

[Continued on next page]

(54) Title: **LIQUID CRYSTAL DISPLAY APPARATUS WITH IMPROVED LUMINANCE CONTROL**



(57) Abstract: In an RGBW-type liquid crystal display device, luminance is improved by the addition of W sub-pixels while an image is displayed without any change in chromaticity of halftones. Digital corrected values for red, green and blue are obtained by adding a predetermined digital value for driving a W sub-pixel to each of RGB digital values which correspond respectively to pixels of an acquired image. A converting calculation is effected on the digital corrected values such that the ratio of these digital corrected values for red, green and blue is made equal to the ratio of the red, green and blue digital values corresponding to the pixels of said acquired image. The RGBW sub-pixels are driven with the converted values and the predetermined digital value for driving W sub-pixel to thereby display an image.



WO 01/37249 A3



(88) Date of publication of the international search report:
7 February 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

Pct/EP 00/11250

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G09G3/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 541 295 A (CANON KK) 12 May 1993 (1993-05-12) page 3, line 15 -page 4, line 13 page 6, line 28 -page 9, line 24 figures 1,4,10-12 ---	1-6
A	FR 2 534 052 A (SUWA SEIKOSHA KK) 6 April 1984 (1984-04-06) page 16, line 21 -page 17, line 4 figure 16 ---	1-6
A	EP 0 330 361 A (GEN ELECTRIC) 30 August 1989 (1989-08-30) abstract -----	1-6



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

13 July 2001

Date of mailing of the international search report

19/07/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Farricella, L

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/11250

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0541295 A	12-05-1993	CA 2081643 A	08-05-1993
		DE 69226689 D	24-09-1998
		DE 69226689 T	28-01-1999
		JP 5241551 A	21-09-1993
		US 5929843 A	27-07-1999
FR 2534052 A	06-04-1984	JP 1984033 C	25-10-1995
		JP 4069370 B	06-11-1992
		JP 59061818 A	09-04-1984
		DE 3313804 A	06-09-1984
		GB 2130781 A, B	06-06-1984
		HK 69889 A	08-09-1989
		SG 40188 G	27-01-1989
		US RE33882 E	14-04-1992
		US 4600274 A	15-07-1986
		US 4716403 A	29-12-1987
		US 4653862 A	31-03-1987
EP 0330361 A	30-08-1989	DE 68906051 D	27-05-1993
		DE 68906051 T	02-09-1993
		JP 2005083 A	09-01-1990
		KR 145184 B	15-07-1998
		US 4892391 A	09-01-1990